




# iHip Fold-up Portable Speaker Replacement

If you are experiencing audio distortion with your device, you can replace the individual speakers using this guid.

Written By: Lisa

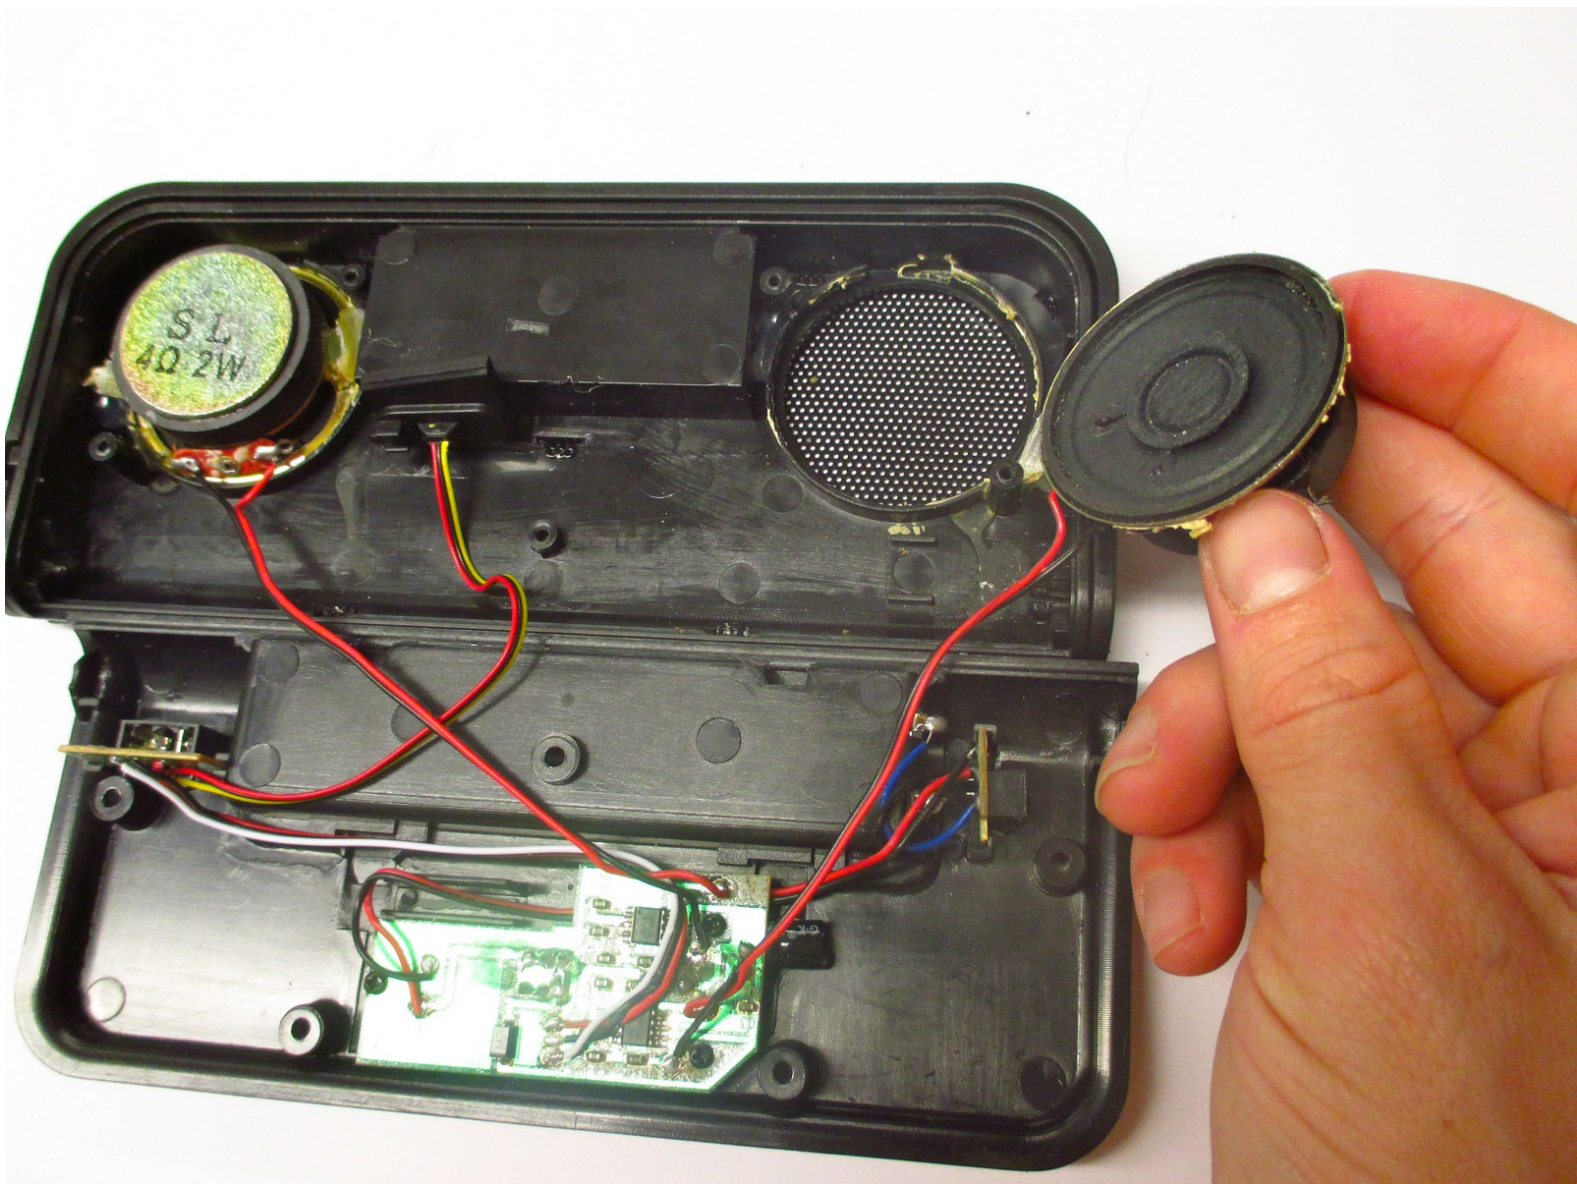



## TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Fingers](#) (1)
- [Portable Soldering Iron](#) (1)
- [Glue Gun](#) (1)



## PARTS:


- [iHip individual speakers](#) (1)

## Step 1 — Removing the battery case cover



- 1. Place the device on a flat surface as shown.
- ⓘ The battery case cover is found at the bottom of the device.
- 2. To remove the battery case cover, push down gently and slide the cover in the direction that the arrows indicate.

## Step 2 — Cleaning the battery case

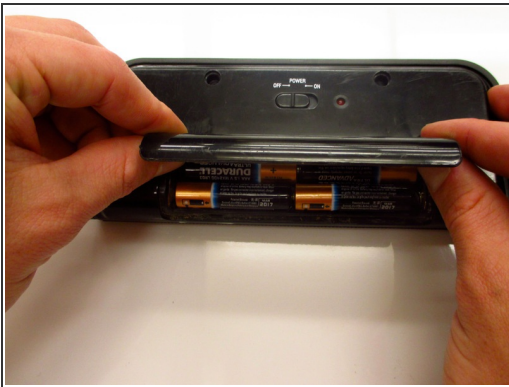

- 1. Remove and discard the old batteries.
- 2. Use the detailing brush and a paper towel to remove any corrosion left by previous batteries.




## Step 3 — Inserting new AAA batteries



- Insert batteries with the "-", or dull side, facing the springs.


**i** If you are replacing the stand, you'll insert the batteries last.

## Step 4 — Removing the screws

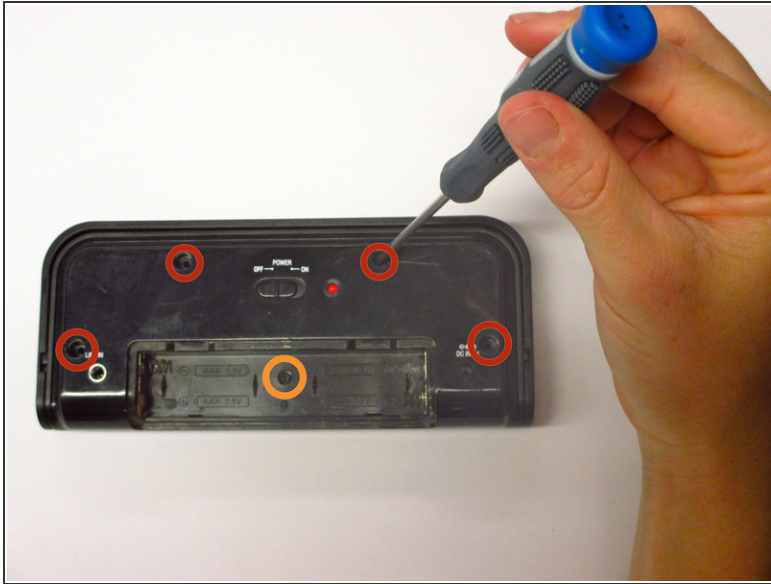


- Unscrew the four outer 1.0 mm screws with a Phillips-Head screwdriver.
  - ❗ Screws will be magnetized in position and will require the use of tweezers to be removed.
- Push down gently on the battery case cover and slide it in the direction the arrows indicate. Remove the batteries.
- Unscrew the 0.6 mm screw located in the center of the battery case.
- Keep 10 mm and 0.6 mm screws separate from each other for reassembly.

## Step 5 — Removing the back cover

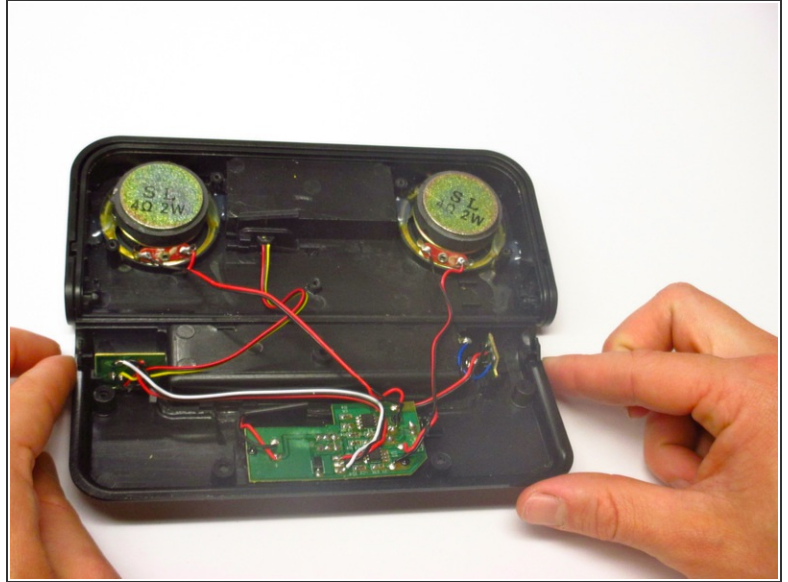

- Remove the back cover carefully; there are many wires that connect it to the device.


## Step 6 — Locating Speakers

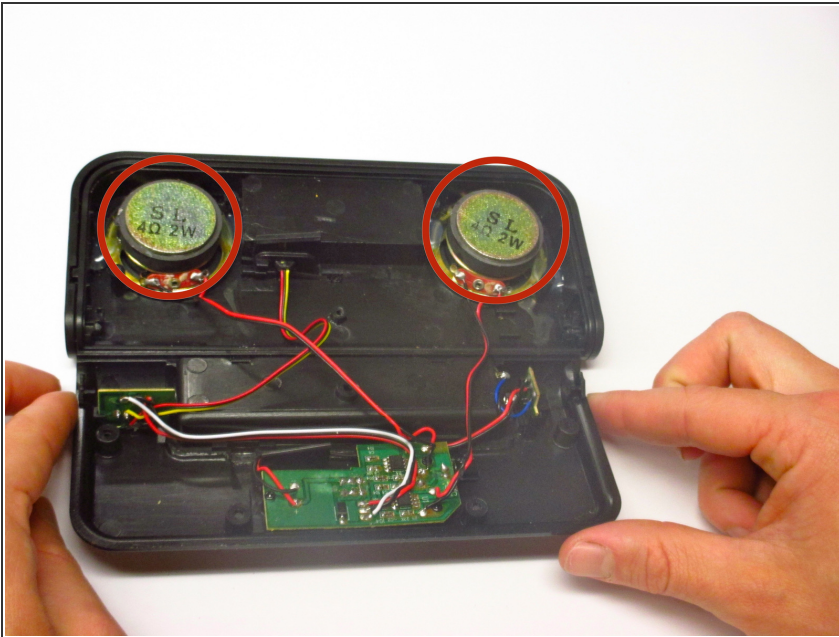

- Locate individual speakers on either side of the front cover




## Step 7 — Removing Individual Speakers

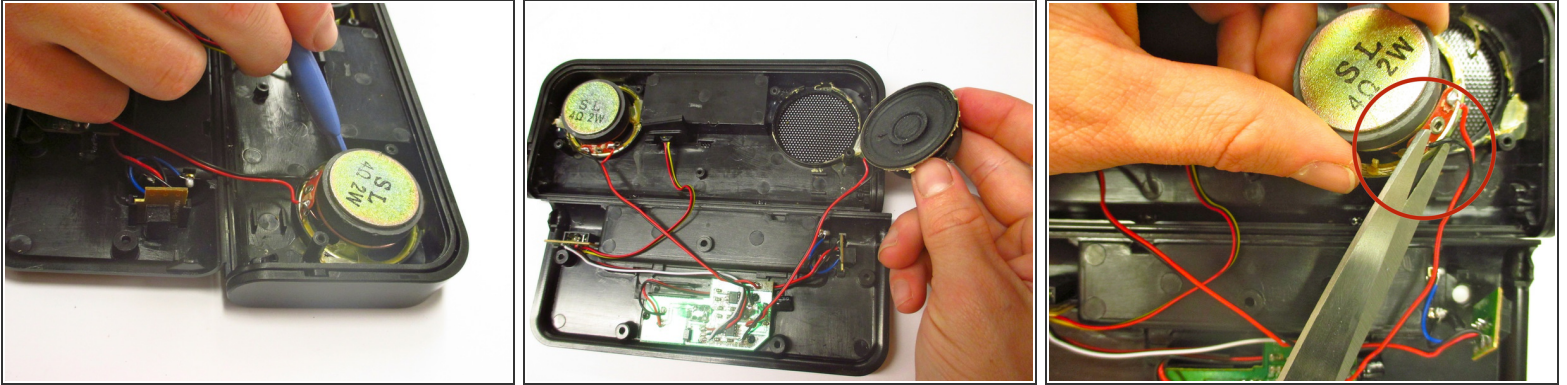

- Using a plastic tool, scrape the glue from around the speakers
- Gently pull speakers up away from the front cover until completely detached
- Using scissors, cut the attached wires from the speakers

## Step 8 — Adding New Speakers

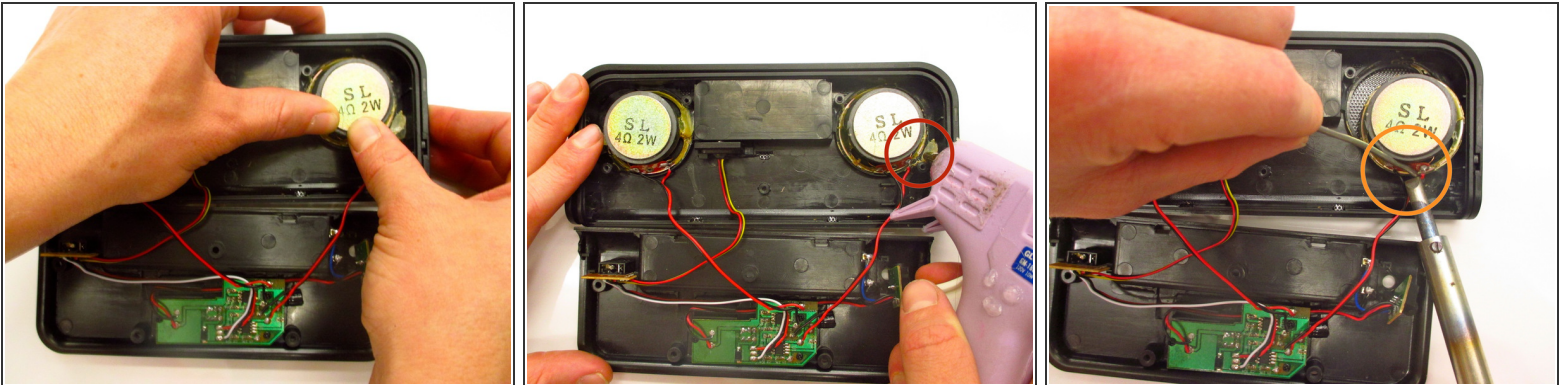

- Position new speakers over original speaker spot
- Using a hot glue gun, glue the new speakers in place
- Using a soldering iron and soldering wire, reattach the wires back into their original position

⚠ Be careful, both hot glue gun and soldering iron can become extremely hot

To reassemble your device, follow these instructions in reverse order.

